

产品亮点

绿色环保

- ★电动电驱，绿色环保
- ★零排放，满足室内外排放要求严格的工地需求

结构紧凑

- ★全系紧凑设计，同时兼顾高维护性，狭窄复杂工况作业能力更强

性能卓越

- ★全系标配最大作业角度5度，作业范围，作业场地适应性更强
- ★超强多场景多工况适应

维修成本低

- ★对比柴油动力，电池保养成本低，降低整体运营成本

电动电驱

- ★低成本，低噪音，低维护，绿色环保节能



标准特征

工作平台液压调平	行走制动机械解除	喇叭和蜂鸣器安全警示
汽车级全管护套保护	平台旋转	最大允许3°工作倾角
倾斜保护系统	称重系统	报警灯安全警示
紧急停止系统	应急下降系统	故障诊断系统

选配特征

Ac电源线至平台	文件盒
实心轮胎	T-BOX (GPS)
无痕轮胎	





HZ SERIES

HZ160JE

SELF-PROPELLED ARTICULATED BOOM

Model	HZ160JE	
Dimension	Metric	Imperial
Max. Working Height	16.5m	54ft 2in
Max. Platform Height	14.8m	48ft 7in
Max. Outreach	8.04m	26ft 5in
Max. Up and Over Clearance	8.077m	26ft 6in
A Length (stowed)	5.98m	19ft 7in
B Width (stowed)	1.804m	5ft 11in
C Height (stowed)	2.166m	7ft 1in
D Wheelbase	1.89m	6ft 2in
Ground Clearance	0.179m	0ft 7in
Platform Size ((L×W×H)	1.75m×0.76m×1.1m	5ft9in×2ft6in×3ft7in
Performance		
Lift Capacity	230kg	507 lb
Turntable Rotation	360°non-continuous	360°non-continuous
Platform Rotation	180°	180°
Drive Speed (Stowed)	4.8km/h	3 mph
Drive Speed (Raised)	1km/h	0.62mph
Gradeability	30%	30%
Turing Radius (Inside)	1.15m	3ft 9in
Turing Radius (Outside)	/	/
Turntable Tailswing	0	0
Max. Tilt Angle(Front to Back/ Side to Side)	5°/3°	5°/3°
Drive wheels number x Steering wheels number	2×2	2×2
Tire Specification/ Type	250-15 / 7.0	250-15 / 7.0
Power		
Battery Specifications	DC48/320Ah	DC48/320Ah
Control Voltage	DC12V	DC12V
Hydraulic Tank Capacity	42L	11 gal
Weight		
Total Weight	7482kg	16495 lb

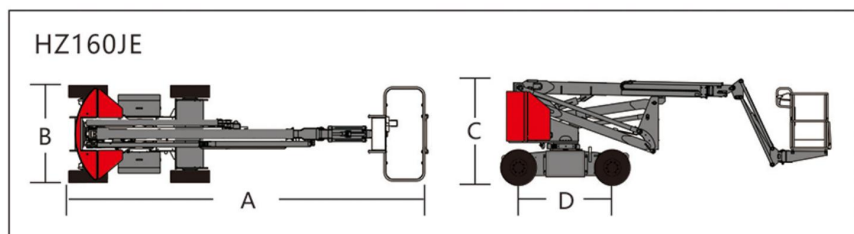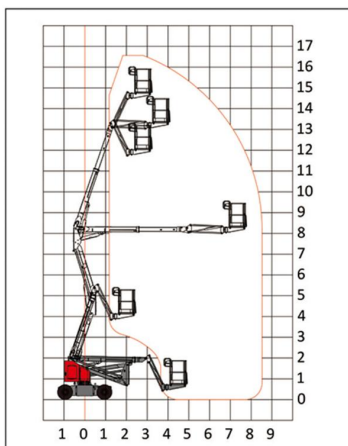

The images in this manual are for illustration only, and all copyrights belong to our company. Due to continuous technological updates, product parameters may change without prior notice.



Mantall

滨海大道62号

美通重工有限公司
MANTALL HEAVY INDUSTRIES